

Conventional Nylon Cable Ties — Black and Natural/White




Product features:

- High tensile strength with low insertion force
- Excellent resistance to weathering and external agents
- Self-locking for fast and easy application

TECHNICAL INFORMATION

Quantity	100 cable ties per pack
Material	UL approved Nylon 66, 94V-2
Operating Temperature	-40°F to +185°F
Flammability rating	UL 94 class V2
Compliance	UL Type 21, ROHS Certified, AH-2 Plenum Rated

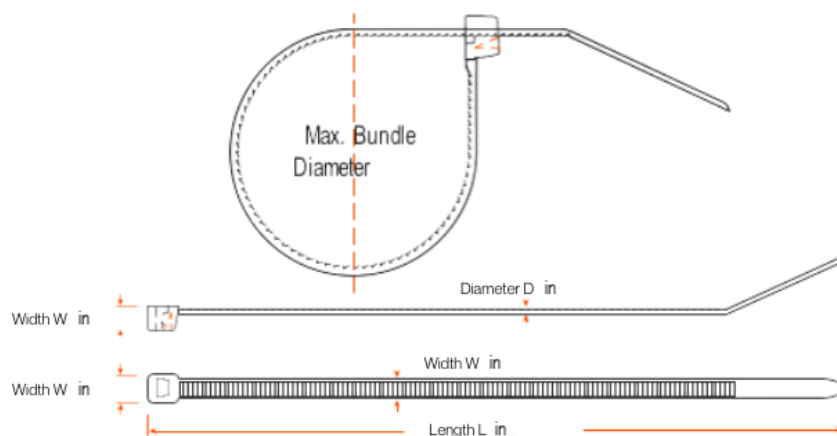

Disclaimer Notice

The above information is given only as a guide, the user should ensure that the performance of the product is sufficient for application. The quoted values are average and should not be taken as maximum or minimum values for specific purposes. GTSE cannot be held responsible for product failure unless full testing has been carried out. The user has to decide on the cable ties suitability for their own applications.

Miniature Cable Ties

18LB BLACK

SKU	LENGTH INCHES	TENSILE STRENGTH	TIE COLOR	PACKAGE QUANTITY	CARTON QUANTITY*	WIDTH INCHES	THICKNESS INCHES	MAX BUNDLE DIA. IN.
CT3-18-B-100	3.1	18 lbs	Black	100	70000	0.10	0.04	0.6
CT4-18-B-100	3.9	18 lbs	Black	100	55000	0.10	0.04	0.9
CT5-18-B-100	4.7	18 lbs	Black	100	45000	0.10	0.04	1.1
CT6-18-B-100	6.5	18 lbs	Black	100	40000	0.10	0.04	1.7
CT8-18-B-100	7.9	18 lbs	Black	100	30000	0.10	0.04	2.2
CT10-18-B-100	9.8	18 lbs	Black	100	22000	0.10	0.04	2.7
CT16-18-B-100	15.7	18 lbs	Black	100	15000	0.10	0.04	4.6

18LB NATURAL

SKU	LENGTH INCHES	TENSILE STRENGTH	TIE COLOR	PACKAGE QUANTITY	CARTON QUANTITY*	WIDTH INCHES	THICKNESS INCHES	MAX BUNDLE DIA. IN.
CT3-18-N-100	3.1	18 lbs	Natural	100	70000	0.10	0.04	0.6
CT4-18-N-100	3.9	18 lbs	Natural	100	55000	0.10	0.04	0.9
CT5-18-N-100	4.7	18 lbs	Natural	100	45000	0.10	0.04	1.1
CT6-18-N-100	6.5	18 lbs	Natural	100	40000	0.10	0.04	1.7
CT8-18-N-100	7.9	18 lbs	Natural	100	30000	0.10	0.04	2.2
CT10-18-N-100	9.8	18 lbs	Natural	100	22000	0.10	0.04	2.7
CT16-18-N-100	15.7	18 lbs	Natural	100	15000	0.10	0.04	4.6

* CARTON QUANTITY refers to the number of individual cable ties

Disclaimer Notice

The above information is given only as a guide, the user should ensure that the performance of the product is sufficient for application. The quoted values are average and should not be taken as maximum or minimum values for specific purposes. GTSE cannot be held responsible for product failure unless full testing has been carried out. The user has to decide on the cable ties suitability for their own applications.

Intermediate Cable Ties

40LB BLACK

SKU	LENGTH INCHES	TENSILE STRENGTH	TIE COLOR	PACKAGE QUANTITY	CARTON QUANTITY*	WIDTH INCHES	THICKNESS INCHES	MAX BUNDLE DIA. IN.
CT6-40-B-100	5.9	40 lbs	Black	100	30000	0.14	0.06	1.4
CT7-40-B-100	7.1	40 lbs	Black	100	20000	0.14	0.06	1.8
CT8-40-B-100	7.9	40 lbs	Black	100	20000	0.14	0.06	2.1
CT12-40-B-100	11.8	40 lbs	Black	100	17000	0.14	0.06	3.0
CT14-40-B-100	14.6	40 lbs	Black	100	12000	0.14	0.06	4.1

40LB NATURAL

SKU	LENGTH INCHES	TENSILE STRENGTH	TIE COLOR	PACKAGE QUANTITY	CARTON QUANTITY*	WIDTH INCHES	THICKNESS INCHES	MAX BUNDLE DIA. IN.
CT6-40-N-100	5.9	40 lbs	Natural	100	30000	0.14	0.06	1.4
CT7-40-N-100	7.1	40 lbs	Natural	100	20000	0.14	0.06	1.8
CT8-40-N-100	7.9	40 lbs	Natural	100	20000	0.14	0.06	2.1
CT12-40-N-100	11.8	40 lbs	Natural	100	17000	0.14	0.06	3.0
CT14-40-N-100	14.6	40 lbs	Natural	100	12000	0.14	0.06	4.1

* CARTON QUANTITY refers to the number of individual cable ties

Disclaimer Notice

The above information is given only as a guide, the user should ensure that the performance of the product is sufficient for application. The quoted values are average and should not be taken as maximum or minimum values for specific purposes. GTSE cannot be held responsible for product failure unless full testing has been carried out. The user has to decide on the cable ties suitability for their own applications.

Standard Cable Ties

50LB BLACK

SKU	LENGTH INCHES	TENSILE STRENGTH	TIE COLOR	PACKAGE QUANTITY	CARTON QUANTITY*	WIDTH INCHES	THICKNESS INCHES	MAX BUNDLE DIA. IN.
CT5-50-B-100	4.7	50 lbs	Black	100	20000	0.19	0.06	1.1
CT6-50-B-100	6.3	50 lbs	Black	100	16000	0.19	0.06	1.5
CT8-50-B-100	8.0	50 lbs	Black	100	15000	0.19	0.06	2.0
CT10-50-B-100	9.8	50 lbs	Black	100	12000	0.19	0.06	2.7
CT11-50-B-100	11.0	50 lbs	Black	100	11000	0.19	0.06	3.0
CT12-50-B-100	11.8	50 lbs	Black	100	12000	0.19	0.06	3.3
CT14-50-B-100	14.6	50 lbs	Black	100	9000	0.19	0.06	4.1
CT15-50-B-100	15.2	50 lbs	Black	100	8500	0.19	0.06	4.3
CT17-50-B-100	16.9	50 lbs	Black	100	7500	0.19	0.06	4.9
CT18-50-B-100	17.7	50 lbs	Black	100	6000	0.19	0.06	5.2
CT20-50-B-100	19.7	50 lbs	Black	100	5000	0.19	0.06	5.8
CT22-50-B-100	21.7	50 lbs	Black	100	5600	0.19	0.06	6.4
CT25-50-B-100	25.0	50 lbs	Black	100	5500	0.19	0.06	7.4
CT29-50-B-100	28.7	50 lbs	Black	100	4000	0.19	0.06	8.5

50LB NATURAL

SKU	LENGTH INCHES	TENSILE STRENGTH	TIE COLOR	PACKAGE QUANTITY	CARTON QUANTITY*	WIDTH INCHES	THICKNESS INCHES	MAX BUNDLE DIA. IN.
CT5-50-N-100	4.7	50 lbs	Natural	100	20000	0.19	0.06	1.1
CT6-50-N-100	6.3	50 lbs	Natural	100	16000	0.19	0.06	1.5
CT8-50-N-100	8.0	50 lbs	Natural	100	15000	0.19	0.06	2.0
CT10-50-N-100	9.8	50 lbs	Natural	100	12000	0.19	0.06	2.7
CT11-50-N-100	11.0	50 lbs	Natural	100	11000	0.19	0.06	3.0
CT12-50-N-100	11.8	50 lbs	Natural	100	12000	0.19	0.06	3.3
CT14-50-N-100	14.6	50 lbs	Natural	100	9000	0.19	0.06	4.1
CT15-50-N-100	15.2	50 lbs	Natural	100	8500	0.19	0.06	4.3
CT17-50-N-100	16.9	50 lbs	Natural	100	7500	0.19	0.06	4.9
CT18-50-N-100	17.7	50 lbs	Natural	100	6000	0.19	0.06	5.2
CT20-50-N-100	19.7	50 lbs	Natural	100	5000	0.19	0.06	5.8
CT22-50-N-100	21.7	50 lbs	Natural	100	5600	0.19	0.06	6.4
CT25-50-N-100	25.0	50 lbs	Natural	100	5500	0.19	0.06	7.4
CT29-50-N-100	28.7	50 lbs	Natural	100	4000	0.19	0.06	8.5

* CARTON QUANTITY refers to the number of individual cable ties

Heavy Duty Cable Ties

120LB BLACK

SKU	LENGTH INCHES	TENSILE STRENGTH	TIE COLOR	PACKAGE QUANTITY	CARTON QUANTITY*	WIDTH INCHES	THICKNESS INCHES	MAX BUNDLE DIA. IN.
CT6-120-B-100	5.9	120 lbs	Black	100	8000	0.30	0.07	1.3
CT8-120-B-100	7.9	120 lbs	Black	100	7000	0.30	0.07	2.0
CT9-120-B-100	9.4	120 lbs	Black	100	6000	0.30	0.07	2.6
CT12-120-B-100	11.8	120 lbs	Black	100	5000	0.30	0.07	3.1
CT14-120-B-100	14.6	120 lbs	Black	100	4000	0.30	0.07	4.0
CT18-120-B-100	17.7	120 lbs	Black	100	2500	0.30	0.07	5.0
CT22-120-B-100	21.7	120 lbs	Black	100	2000	0.30	0.07	6.3
CT30-120-B-100	29.5	120 lbs	Black	100	2000	0.30	0.07	8.6

120LB NATURAL

SKU	LENGTH INCHES	TENSILE STRENGTH	TIE COLOR	PACKAGE QUANTITY	CARTON QUANTITY*	WIDTH INCHES	THICKNESS INCHES	MAX BUNDLE DIA. IN.
CT6-120-N-100	5.9	120 lbs	Natural	100	8000	0.30	0.07	1.3
CT8-120-N-100	7.9	120 lbs	Natural	100	7000	0.30	0.07	2.0
CT9-120-N-100	9.4	120 lbs	Natural	100	6000	0.30	0.07	2.6
CT12-120-N-100	11.8	120 lbs	Natural	100	5000	0.30	0.07	3.1
CT14-120-N-100	14.6	120 lbs	Natural	100	4000	0.30	0.07	4.0
CT18-120-N-100	17.7	120 lbs	Natural	100	2500	0.30	0.07	5.0
CT22-120-N-100	21.7	120 lbs	Natural	100	2000	0.30	0.07	6.3
CT30-120-N-100	29.5	120 lbs	Natural	100	2000	0.30	0.07	8.6

* CARTON QUANTITY refers to the number of individual cable ties

Disclaimer Notice

The above information is given only as a guide, the user should ensure that the performance of the product is sufficient for application. The quoted values are average and should not be taken as maximum or minimum values for specific purposes. GTSE cannot be held responsible for product failure unless full testing has been carried out. The user has to decide on the cable ties suitability for their own applications.

Extra Heavy Duty Cable Ties

175LB BLACK

SKU	LENGTH INCHES	TENSILE STRENGTH	TIE COLOR	PACKAGE QUANTITY	CARTON QUANTITY*	WIDTH INCHES	THICKNESS INCHES	MAX BUNDLE DIA. IN.
CT17-175-B-100	17.7	175 lbs	Black	100	2500	0.35	0.08	5.0
CT21-175-B-100	21.7	175 lbs	Black	100	2000	0.35	0.08	6.3
CT24-175-B-100	24.0	175 lbs	Black	100	2000	0.35	0.08	7.0
CT28-175-B-100	28.0	175 lbs	Black	100	2000	0.35	0.08	8.2
CT30-175-B-100	30.0	175 lbs	Black	100	2000	0.35	0.08	8.9
CT36-175-B-100	36.0	175 lbs	Black	100	1200	0.35	0.08	9.6
CT40-175-B-100	40.6	175 lbs	Black	100	1000	0.35	0.08	10.8
CT46-175-B-100	46.0	175 lbs	Black	100	1000	0.35	0.08	14.0
CT48-175-B-100	48.0	175 lbs	Black	100	1000	0.35	0.08	14.6
CT60-175-B-100	59.1	175 lbs	Black	100	500	0.35	0.08	18.2

175LB NATURAL

SKU	LENGTH INCHES	TENSILE STRENGTH	TIE COLOR	PACKAGE QUANTITY	CARTON QUANTITY*	WIDTH INCHES	THICKNESS INCHES	MAX BUNDLE DIA. IN.
CT17-175-N-100	17.7	175 lbs	Natural	100	2500	0.35	0.08	5.0
CT21-175-N-100	21.7	175 lbs	Natural	100	2000	0.35	0.08	6.3
CT24-175-N-100	24.0	175 lbs	Natural	100	2000	0.35	0.08	7.0
CT28-175-N-100	28.0	175 lbs	Natural	100	2000	0.35	0.08	8.2
CT30-175-N-100	30.0	175 lbs	Natural	100	2000	0.35	0.08	8.9
CT36-175-N-100	36.0	175 lbs	Natural	100	1200	0.35	0.08	9.6
CT40-175-N-100	40.6	175 lbs	Natural	100	1000	0.35	0.08	10.8
CT46-175-N-100	46.0	175 lbs	Natural	100	1000	0.35	0.08	14.0
CT48-175-N-100	48.0	175 lbs	Natural	100	1000	0.35	0.08	14.6
CT60-175-N-100	59.1	175 lbs	Natural	100	500	0.35	0.08	18.2

* CARTON QUANTITY refers to the number of individual cable ties

Disclaimer Notice

The above information is given only as a guide, the user should ensure that the performance of the product is sufficient for application. The quoted values are average and should not be taken as maximum or minimum values for specific purposes. GTSE cannot be held responsible for product failure unless full testing has been carried out. The user has to decide on the cable ties suitability for their own applications.

Ultra Heavy Duty Cable Ties

250LB BLACK

SKU	LENGTH INCHES	TENSILE STRENGTH	TIE COLOR	PACKAGE QUANTITY	CARTON QUANTITY*	WIDTH INCHES	THICKNESS INCHES	MAX BUNDLE DIA. IN.
CT11-250-B-100	11.0	250 lbs	Black	100	2700	0.50	0.09	2.9
CT15-250-B-100	15.0	250 lbs	Black	100	1500	0.50	0.09	4.1
CT19-250-B-100	18.9	250 lbs	Black	100	1500	0.50	0.09	5.4
CT22-250-B-100	22.8	250 lbs	Black	100	1200	0.50	0.09	6.7
CT28-250-B-100	28.7	250 lbs	Black	100	1000	0.50	0.09	8.5
CT34-250-B-100	34.6	250 lbs	Black	100	600	0.50	0.09	10.4
CT40-250-B-100	40.6	250 lbs	Black	100	600	0.50	0.09	12.3
CT60-250-B-100	60.2	250 lbs	Black	100	300	0.50	0.09	18.5

250LB NATURAL

SKU	LENGTH INCHES	TENSILE STRENGTH	TIE COLOR	PACKAGE QUANTITY	CARTON QUANTITY*	WIDTH INCHES	THICKNESS INCHES	MAX BUNDLE DIA. IN.
CT11-250-N-100	11.0	250 lbs	Natural	100	2700	0.50	0.09	2.9
CT15-250-N-100	15.0	250 lbs	Natural	100	1500	0.50	0.09	4.1
CT19-250-N-100	18.9	250 lbs	Natural	100	1500	0.50	0.09	5.4
CT22-250-N-100	22.8	250 lbs	Natural	100	1200	0.50	0.09	6.7
CT28-250-N-100	28.7	250 lbs	Natural	100	1000	0.50	0.09	8.5
CT34-250-N-100	34.6	250 lbs	Natural	100	600	0.50	0.09	10.4
CT40-250-N-100	40.6	250 lbs	Natural	100	600	0.50	0.09	12.3
CT60-250-N-100	60.2	250 lbs	Natural	100	300	0.50	0.09	18.5

* CARTON QUANTITY refers to the number of individual cable ties

Disclaimer Notice

The above information is given only as a guide, the user should ensure that the performance of the product is sufficient for application. The quoted values are average and should not be taken as maximum or minimum values for specific purposes. GTSE cannot be held responsible for product failure unless full testing has been carried out. The user has to decide on the cable ties suitability for their own applications.